




# IR203C, IR204C, IR205C Apartment Intercom Stations Specification Sheet

IL233  
Section A  
Rev. 16 - 06/2004

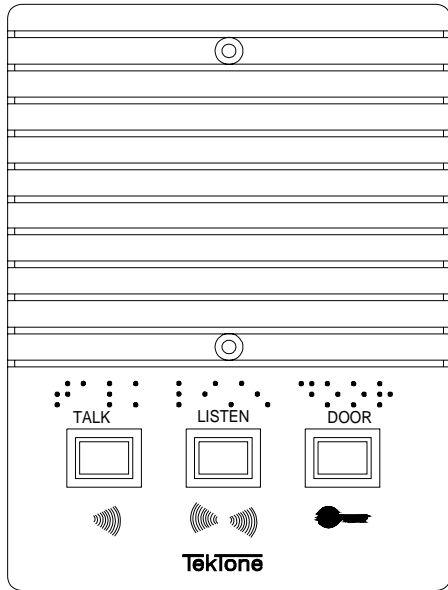

**IR203C, IR204C, IR205C**

## ARCHITECTS' AND ENGINEERS' SPECIFICATION

Apartment intercom stations shall be TekTone®'s IR203C, IR204C or IR205C. The stations shall be equipped with momentary-action push buttons for talk, listen and door operation. Buttons shall be labeled in English, and with both international and Braille symbols. The speaker/microphone shall be a 2.5" high-sensitivity type with voice-frequency response. The station shall have an attractive, flame retardant ABS plastic faceplate with screw terminal connections.

Required wiring shall be just 2 common and 1 selective wires for the IR203C station; 3 common and 1 selective wires for the IR204C station; and 4 common and 1 selective wires for the IR205C station.

## FEATURES

The IR203C, IR204C, IR205C Apartment Intercom Stations combine modern styling with ease of operation to provide natural, clear voice communication and positive door-release operation. The attractive flame retardant ABS plastic faceplates are surface mounted, and blend with any setting. The advanced circuitry and versatility permit use in large or small buildings, with one or several entrances.

A wide variety of optional accessories is available to provide additional functions, such as multiple entrance operation and post office door release.

- Surface mounted
- Simple, push button operation
- Easy installation
- Advanced design
- Automatic privacy
- Clear voice quality
- Precision-engineered for reliability
- English text, international symbols and Braille

## SPECIFICATIONS

Dimensions:	Height:	6.875" (175 mm)
	Width:	5" (127 mm)
	Depth:	1.5" (38 mm)
	Projects:	1.5" (38 mm)
		from mounting surface
Finish:	Attractive, flame retardant ABS plastic.	
Controls:	Individually replaceable push buttons with self-wiping contacts. Identified for talk, listen and door functions.	
Speaker/Mic:	2.5" (62.5 mm) with voice response. Also used for electronic tone signal.	
Connection:	Screw terminals standard.	
Housings:	Single-gang ring or single-gang electrical box.	

## REQUIRED COMPONENTS

AM/CM Series	Entrance Panels
PK543/A	Amplifier
SS Series	Transformers

[www.tektone.NET](http://www.tektone.NET)

277 Industrial Park Road • Franklin, NC 28734 • Phone (828) 524-9967 • Fax (828) 524-9968

Email: [tektone@tektone.net](mailto:tektone@tektone.net) • Technical Assistance Email: [teksupt@tektone.net](mailto:teksupt@tektone.net)

**TekTone®'s quality system is registered by UL® to the ISO 9001:2000 standard. (File #A10766.)**