




Tek-ENTRY® AM612 Series Entrance Panels Specification Sheet

IL525
Section A
Rev. 5 - 09/2004

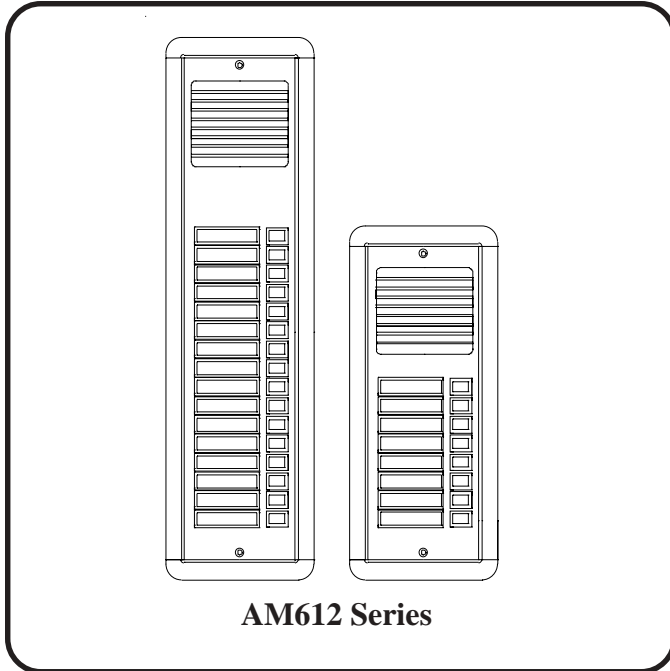

AM612 Series

ARCHITECTS' AND ENGINEERS' SPECIFICATION

The entrance panel shall be TekTone® AM612 Series or approved equal, and shall provide for up to 16 push buttons per speaker panel. The panel shall include a weather-resistant Mylar speaker mounted behind a black flame retardant polycarbonate plastic grill. Push button switches shall be individually replaceable type with self-wiping contacts. In addition, the panel shall contain up to 16 individually replaceable name holders. The name holders shall be made of black flame retardant polycarbonate plastic with clear flame retardant polycarbonate plastic lenses to protect card inserts.

The AM612 shall have top and bottom decorative end caps that shall also serve as mounting brackets to allow flush or surface mounting. The decorative end caps shall be made of black flame retardant polycarbonate plastic.

Each AM612 panel, or approved equal, shall be supplied with name card sheets that may be easily separated into individual name strips. Name strips shall be inserted into name holders without the use of tools.

FEATURES

The AM612 Series Entrance Panel is a modular series for use with TekTone® loud-speaker type suite stations.

Panels are equipped with a weather-resistant mylar speaker protected by a black flame retardant polycarbonate plastic grill.

The anodized aluminum panel is available in two sizes. The 4.75" x 11.25" panel accommodates from 2 to 8 push buttons, and the 4.75" x 17.25" panel is used for applications requiring from 10 to 16 push buttons.

The speaker panel can accommodate up to 16 push buttons. In addition, the panel also contains up to 16 name holders with plastic lenses that snap easily into the panel and are individually replaceable.

- Hands-free loud-speaking
- Weather-resistant mylar speaker
- Self-wiping push button switches
- Decorative end caps
- Individually replaceable name holders
- Slim-line surface-mount option
- Simple installation

SPECIFICATIONS

Dimensions:	Height: 11.25" or 17.25"
	Width: 4.75"
Push button:	Individually replaceable type with self-wiping contacts
Speaker:	2.5" (64 mm) voice frequency response
Construction:	Anodized extruded aluminum panel
Housings, flush:	OH600 Back box for 11.25" panel OH601 Back box for 17.25" panel
Surface mount:	Optional surface mount entrance panel add "S" to panel part number (i.e., AM612/10S)
Name holders:	2.125" x 1.0625"

REQUIRED COMPONENTS

IR100, IR200 Series	Apartment Remotes
PK543	Amplifier
SS102A, SS105B	Transformer

www.tektone.NET

277 Industrial Park Road • Franklin, NC 28734 • Phone (828) 524-9967 • Fax (828) 524-9968

Email: tektone@tektone.net • Technical Assistance Email: teksupt@tektone.net

TekTone®'s quality system is registered by UL® to the ISO 9001:2000 standard. (File #A10766.)