




PO101S Postal Door Release Specification Sheet

IL593
Section A
Rev. 4 - 09/2004

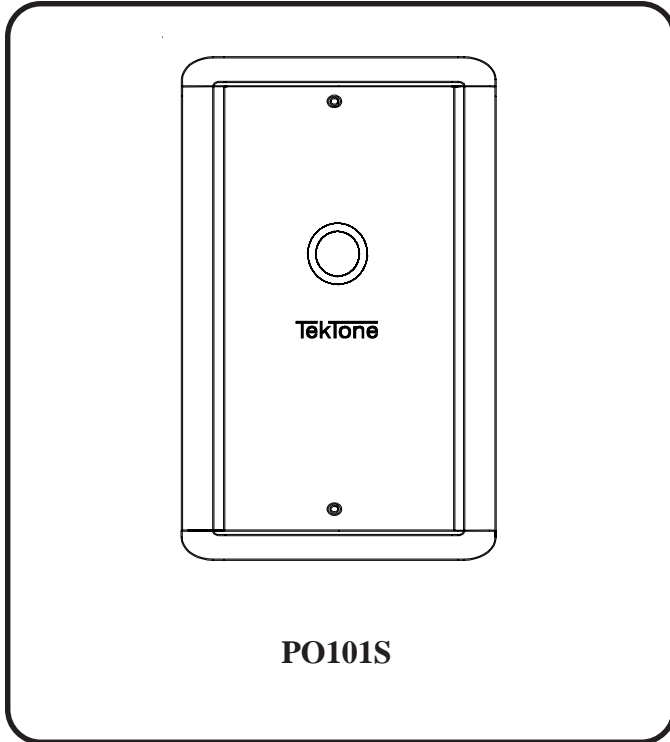

PO101S

ARCHITECTS' AND ENGINEERS' SPECIFICATION

Postal door release shall be TekTone® PO101S or approved equal. Postal door release panel shall be surface mountable and include a gasket to provide resistance to weather exposure. The postal door release shall be constructed of a rugged extruded aluminum panel with necessary mounting hardware and a microswitch to allow for the installation of a postal lock. Endcaps for the panel shall be molded of durable, flame retardant ABS plastic.

The microswitch shall have wire leads to provide for easy connection.

FEATURES

The PO101S Postal Door Release provides for postal lock installation and microswitch control of door release devices. It is constructed of a rugged aluminum panel with durable, flame retardant ABS plastic endcaps. The extrusion design provides sufficient depth to make the panel surface mountable with no additional housing required. A gasket is also attached to the rear surface to increase the station's resistance to weather exposure.

SPECIFICATIONS

Dimensions:	Height:	7.25"	(184 mm)
	Width:	4.9"	(125 mm)
	Depth:	1.5"	(38 mm)
Construction:	Rugged extruded aluminum panel with durable, flame retardant ABS plastic endcaps		
Finish:	Brushed aluminum		

REQUIRED COMPONENTS

Tek-ENTRY®	Apartment Entry System
-or-	Vandal-Resistant Entry System

www.tektone.NET

277 Industrial Park Road • Franklin, NC 28734 • Phone (828) 524-9967 • Fax (828) 524-9968
Email: tektone@tektone.net • Technical Assistance Email: teksupt@tektone.net

TekTone®'s quality system is registered by UL® to the ISO 9001:2000 standard. (File #A10766.)