




# PK407A Door Release Adaptor Specification Sheet

IL612  
Section A  
Rev. 3 - 09/2004

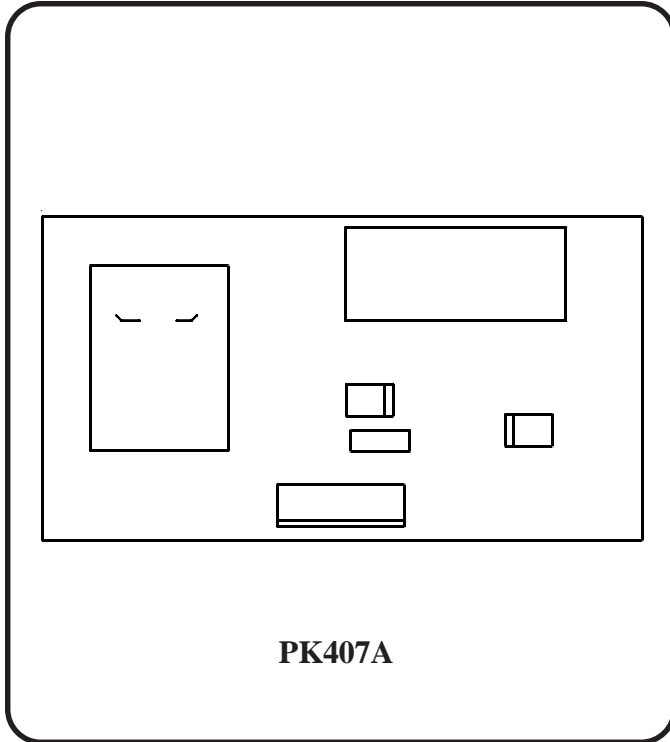

### ARCHITECTS' AND ENGINEERS' SPECIFICATION

The door release adaptor shall be TekTone® model PK407A and shall provide 24 VDC for continuous duty type door releases.

The PK407A circuitry shall be PCB-mounted. A plug-in wire harness shall be provided for connections.

### FEATURES

The PK407A Door Release Adaptor is used in conjunction with the PK543 amplifier to provide constant 24 VDC for a continuous-duty door release.

When the door output is activated by the tenant, the PK407A drops power to the release.

### SPECIFICATIONS

- Dimensions:    Width:    1.5"    (38 mm)  
                         Length:    2.875" (73 mm)
- Connections:    Plug-in wire harness.
- Power Required: 24 VDC (supplied by amplifier).
- Mounting:        Surface mounted with supplied double-sided tape.

### REQUIRED COMPONENTS

- Continuous-Duty Door Release (i.e., Mag Lock)\*  
-and-  
Tek-ENTRY®    Apartment Entry System -or -  
                         Vandal Resistant Entry System

\*Not a TekTone® item.

[www.tektone.NET](http://www.tektone.NET)