

MiniGuard II

Multi-Number Handsfree Telephone Entry System

Description

The Trigon MiniGuard II is a handsfree, multi-number, Telephone Entry System for resident/visitor control. Visitors contact the desired tenant by entering a simple directory code. The resident then grants or denies access.

The MiniGuard II has a capacity of up to 400 telephone numbers and up to 400 personal entry codes. It is constructed for rugged outdoor use, yet remains pleasant in appearance. Its long-lasting brush-finish stainless steel housing complements its thin design lines. A matching flush-mount trim-ring or lighted hood may be selected to add the right finishing touches to an installation.

The MiniGuard II is equipped with valuable features and options that provide a wide range of guest and resident control options—doors, gates, security lighting, and more.

Features

- Available in 24, 50, 125, 200, 300, or 400 resident capacities.
- Capacity includes a telephone number, directory code, and direct entry code for each resident.
- Operates on 12v AC or DC.
- Resident telephone numbers may be up to 12 digits.
- Rotary or touch-tone compatible.
- Programmable Site ID.
- Remotely programmable from any touch-tone telephone.
- Slim design for easy mounting.
- Noncorroding # 316 Stainless Steel weather resistant enclosure with 'tamper resistant' security screws.
- High clarity carbon microphone in a high fidelity acoustical chamber for enhanced sound pickup.
- Double-baffled speaker for improved communication.
- Single output relay (second relay optional).
- Alarm shunt relay aids alarm management.
- *Optional* Modem.
- *Optional* support of Weigand 26 protocol card readers.
- *Optional* 7-Day clock allows the creation of automatic unlock schedules.
- *Optional* printer support allows recording events as they occur.

Applications

- Provides resident controlled guest access for apartments.
- Allows secured entry for office buildings.
- Assures privacy for condominium owners.
- Built-in relay allows positive entrance control in gated communities.



Operation

The MiniGuard II uses an ordinary telephone line to provide positive access control for up to 400 residences. Visitors press the MiniGuard's red 'Start' button and then enter a short code obtained from a nearby directory, or earlier revealed by the resident. The MiniGuard II then silently speed dials the resident's full telephone number. The resident is alerted to the visit in the same manner as receiving any other telephone call.

After the resident answers the entrance call, visitor access may be granted or denied. The resident presses '0' on his keypad to activate the MiniGuard II and grant entry. Otherwise, pressing '7' will hang-up the MiniGuard II and deny visitor entry.

If the MiniGuard II is equipped with a second relay option, this relay may also be activated from the resident's telephone keypad. Relays may be latched to hold an entrance open for special circumstances.

Residents may gain entry at the MiniGuard II by using their direct entry code. They press the '#' key followed by their personal code.

TRIGONTM
ELECTRONICS, INC.
1220 N. Batavia, Orange CA 92867
Ph. 714-633-7442 Fax 714-633-7567
Web site: www.Trigonelectronics.com

MiniGuard II

Specifications

Design- Handsfree speaker telephone with internal auto dial capability and remote control of relays.

Capacity - 24, 50, 125, 200, 300, or 400 residents. Capacity includes 1 to 4 digit directory code, 4 digit direct entry code, and up to 12 digit telephone number for each resident.

Dial Mode - Allows active keypad after dial out.

Site ID - Programmable 4 digit code.

Call Length - Unrestricted, or limited from 1 to 4 minutes.

Programming - Directly on keypad, or remotely via touch-tone telephone.

Power - 120VAC/12VAC, 40VA, Class 2, transformer included (may operate on DC).

Output Ratings -

Power Relay(s): 5 AMPS @ 12VDC or 1 AMP @ 110VAC

Alarm Shunt Relay: 250ma @ 12VAC

Output Duration - Programmable; momentary to 45 seconds, or latched.

Telephone Line - Standard touch-tone or rotary. Dedicated or extension line.


Mounting - Surface, with flush or pedestal mount options.

Construction -

- Noncorroding #316 Stainless Steel weather resistant enclosure and backplate with 'tamper resistant' security screws.
- Double baffled, underwater rated, fiber material speaker.
- High quality carbon microphone in an acoustical chamber.

Operating Temperature - -5° F to +120° F

Mounting

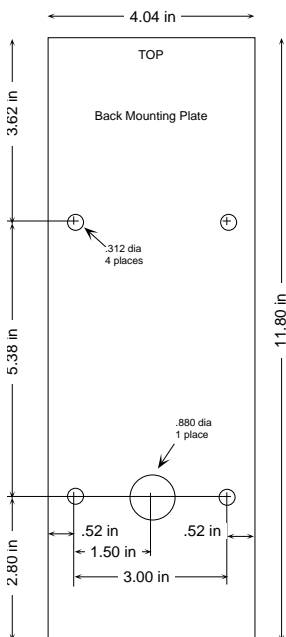

Accessories / Options

Modem Option - Available for all models.

Line Filter - Suppresses RFI/EMI from input power line.

Flush Mount Back Box with Bezel - Used to flush mount unit into a wall or other surface. Bezel enhances flush mount appearance.

Lighted Hood - An aid for outdoor applications, pole, or pedestal mounting.

Postal Lock Box - Allows keyed access to postman.

7-Day Clock - Allows the creation of automatic unlock schedules.

Printer Option - Allows connection to serial printer. Logs events as they occur. Requires 7-Day Clock Option.

Card Reader Interface Module - Supports Weigand 26 protocol reader such as:

HID PROXPRO Proximity Reader, # 5355AGN00.
Securakey Model SK-029W Reader, Format 69.


Fiber Optic Compatible

International Fiber Systems model #s;

TT 2010, TR 2010, TT 2010WDM, TR 2010WDM,

TT 2030, TR 2030, TT 2030WDM, TR 2030WDM

Dimensions/Hookup

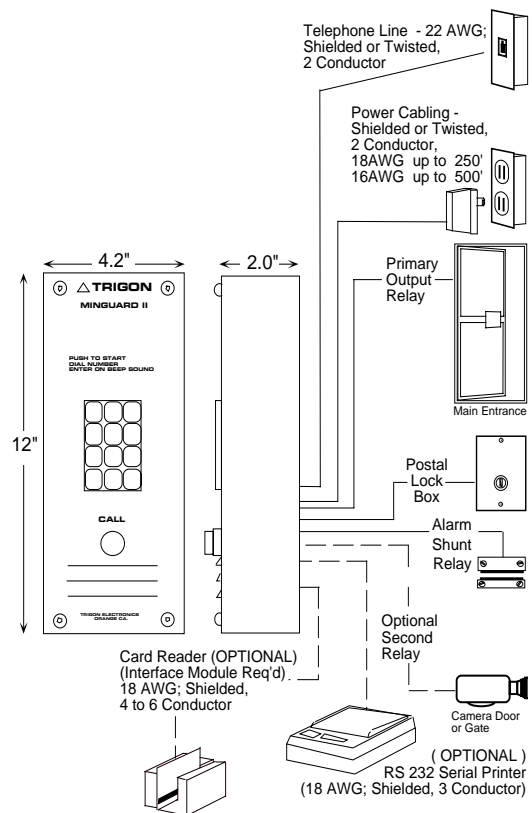

TRIGON
ELECTRONICS, INC.