

Teledial HS

Handset Telephone Line Powered Autodialer

Description

The Teledial HS is a handset telephone line powered autodialer. At the lift of the handset, the Teledial HS dials a primary telephone number. If the number is busy or does not answer, the Teledial HS will hang up and dial the next number and so on, up to 10 numbers.

Features

- Automatically dials a programmed telephone number of up to 16 digits. For added security, the Teledial HS can be programmed to autodial up to 10 numbers.
- Three modes of operation, standard call mode or emergency response mode or ring-down mode
- Operates on telephone line power.
- Programmable site ID.
- Pay telephone style handset with armored cable.
- Remotely programmable from any touch-tone telephone.
- Automatic hangup after programming utilizing "called party disconnect".
- Noncorroding #316 Stainless Steel weather resistant enclosure with 'tamper resistant' security screws.
- Slim design, surface or flush mount.

Applications

- Storage Facilities communications telephone.
- Information/assistance telephone at bank ATM kiosks.
- Security/Help telephone for parking structures.
- Emergency telephone for public areas.
- Standard informational call box configuration.
- Both inside or outside applications.

Operation

At the lift of the handset, the TELEDIAL HS calls a programmed telephone number. If the called number is busy or does not answer, the TELEDIAL HS will automatically dial a second number. If the second number is busy or does not answer, the TELEDIAL HS will dial a third number (up to ten numbers can be programmed). It will continue dialing again and again. Once answered, assistance may be rendered.



The TELEDIAL HF has three operating modes:

Standard Mode:

When the handset is lifted, the TELEDIAL HS dials its programmed telephone numbers as above. Anytime during the phoning process, the calling party can choose to hang up. The standard mode is set to utilize "Called Party Disconnect" for hang up after programming. The Teledial HF will automatically hang up within 8 seconds after the called party hangs up.

Emergency Mode:

As soon as the handset is lifted, the unit begins dialing according to its programming. This mode is frequently used for help, assistance, and duress call applications. The optional emergency mode is set to utilize "Called Party Disconnect" for automatic hang up after programming. The Teledial HS will hang up within 8 seconds after the called party hangs up.

Ring Down Mode:

When the handset is lifted, the Teledial HS seizes the telephone line and waits for the PBX to dial a preprogrammed number. This call may be terminated by either party. The optional ring down mode is set to utilize "Called Party Disconnect" after programming. The Teledial HS will hang up within 8 seconds after the called party hangs up.

TRIGONTM
ELECTRONICS, INC.
1220 N. Batavia, Orange CA 92867
Ph. 714-633-7442 Fax 714-633-7567
Web site: www.Trigonelectronics.com

Teledial HS

Specifications

Design - Handset telephone.

Capacity - Up to 10 numbers, each up to 16 digits in length.

Operation Modes - Three; Standard, emergency or Ring down.

Call Termination - Utilizes "Called Party Disconnect".for call termination during programming. The Teledial HS will hang up within 8 seconds after the called party hangs up.

Site ID - Programmable 4 digit code.

Programming - Remote via touch-tone telephone.

Power - Telephone line powered.

Telephone Line - Standard touch-tone or rotary. Dedicated or extension line.

Mounting - Surface, with flush or pedestal mount options.

Construction -

- Noncorroding #316 Stainless Steel weather resistant enclosure and backplate with 'tamper resistant' security screws.
- Pay phone type handset with armored cable

Operating Temperature - -5° F to $+120^{\circ}$ F

Accessories / Options

Line Filter - Suppresses RFI/EMI from input power line.

Flush Mount Back Box with Bezel - Used to flush mount unit into a wall or other surface. Bezel enhances flush mount appearance.

Lighted Hood - An aid for outdoor applications, pole, or pedestal mounting.

Braille Plate - Emergency Telephone Plate for ADA compliance.

DECODER - Desktop device decodes and displays Site ID information.

Trigon Intercom - Call routing and switching system. Allows multiple Teledial HS units to operate with few, or with no, outside lines.


Fiber Optic Compatible

International Fiber Systems model #s;

TT 2010, TR 2010, TT 2010WDM, TR 2010WDM,

TT 2030, TR 2030, TT 2030WDM, TR 2030WDM

Mounting

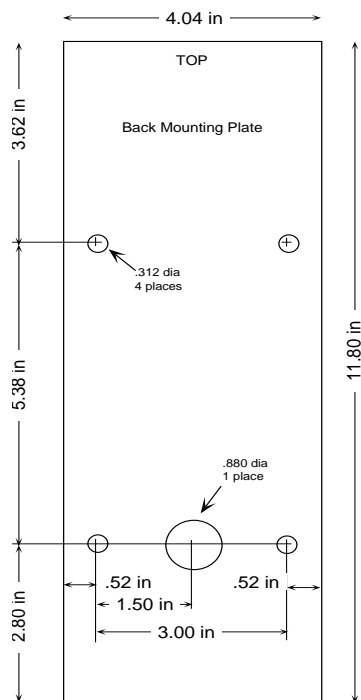

TRIGON
ELECTRONICS, INC.